

CSE 265: System and Network Administration

- Sharing System Files
 - Motivation
 - Copying files around
 - NIS: Network Information Service
 - NIS+ and LDAP



Sharing system files

- A typical host has tens or possibly hundreds of configuration files
 - passwd, shadow, group, hosts, services, aliases, printcap
- A typical network has tens or hundreds of hosts
 - The result is **too much to configure by hand!**



Copying files around

- Solutions

- Group similarly configured machines and distribute configuration files when they change
- Use a central (file) server instead of individual config files
 - Possibly slower, but never out of date
- Brute-force copying isn't elegant, but it
 - works on all machines
 - reliable
 - handles some files that aren't supported otherwise
 - /etc/sendmail.cf, /etc/ntp.conf
- Push vs. pull model of file distribution

Pulling files

- Simple copy utilities
 - Can use **wget** from ftp or web site (or **ncftp**, etc.)
 - Can use NFS and just **cp**
 - Might want to have script verify contents before installing
- Can use **rsync** to synchronize to a server
- Need to stagger access to server
 - Can't just use a cron at same time!
 - Wrap with Perl script to randomize

```
#!/usr/bin/perl  
sleep rand() * 600; # sleep 0-600s (i.e., 10 minutes)  
system(copy_files_down);
```

Push approaches

- Pushing with **rdist**
 - **rdist** distributes files when they are out of date
 - Preserves ownership, permissions, timestamps
- Option #2: **rsync**
 - rsync – similar to rdist, but doesn't just copy
 - Attempts to transfer only the changes to a file
 - Client can run rsync out of inetd
 - Can require a password, restrict access to certain dirs
 - Uses `/etc/rsyncd.conf`

How programs get to system files

- Many configuration files have routines in standard C library
 - getpwuid, getpwnam, getpwent for passwd
 - Routines are capable of using alternative sources
- In Linux, sources of info are determined by `/etc/nsswitch.conf`
- `nscd`: caches many lookup responses
 - cache passwd, group, DNS results
 - `/etc/nscd.conf`

Sample /etc/nsswitch.conf

```
passwd:      files nis
shadow:     files nis
group:      files nis

#hosts:     db files nisplus nis dns
hosts:      files nis dns


bootparams: nis [NOTFOUND=return] files

netgroup:   files
ethers:     files
netmasks:  files
networks:   files
protocols:  files nisplus
rpc:        files
services:   files nisplus

automount:  files nisplus
aliases:    files nisplus
```

NIS: Network Information Service

- Originally called Sun Yellow Pages
- Shares records (i.e., one line per file)
- Master server maintains authoritative copies of system files, in original locations as before
 - Server process makes contents available over net
 - Server maintains multiple NIS “maps” for lookups
 - e.g., lookup passwd.byname passwd.byuid
- Permits use of slave servers to replicate content
 - File changes on master must be pushed to slaves
 - Clients think they are all servers (no difference)

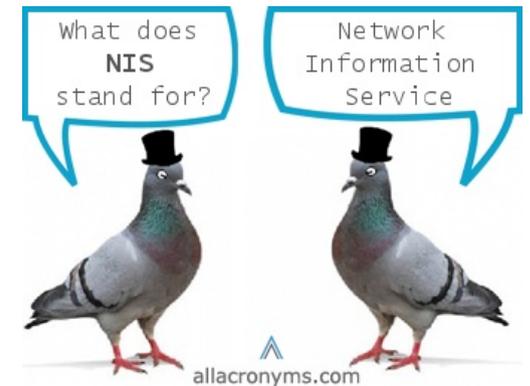

NIS organization

- Domain
 - A server and its clients constitute an NIS domain
- Netgroups
 - Named sets of users, machines, or networks for easy reference in system files
 - Defined in `/etc/netgroup`, shared as an NIS map
 - Format: *groupname list-of-members*
 - Member format: *(hostname, username, nisdomainname)*
 - Example: `(boulder,-,)`
 - Dash/hyphen indicates negation
 - Empty fields match everything

Netgroups

- Larger /etc/netgroup example

```
bobcats      (snake,,) (headrest,,)
servers     (anchor,,) (moet,,) (piper,,) (kirk,,)
anchorclients (xx,,) (watneys,,) (molson,,)
beers       (anchor,,) (anchor-gateway,,) anchorclients
allhosts    beers bobcats servers
```

- Netgroups can be used in /etc/exports

```
/export/projects -access=@bobcats
/export/homefiles -access=@anchorclients,root=@servers
```

- Also in **sudo**
- Netgroups can be used without NIS

NIS

- Client has list of servers in `/etc/yp.conf`
 - Often supplied by DHCP
- NIS server data files are in `/var/yp`
 - Subdirectories are NIS domains, e.g.:
 - `/var/yp/cssuns/passwd.byname`
`/var/yp/cssuns/passwd.byuid`
 - Makefile in `/var/yp` will generate db files from flat (text) files, and run **yppush** to propagate to slaves
- **yplibind** runs on all NIS machines
 - C library contacts local yplibind daemon for every query (if config'd by `/etc/nsswitch.conf`)

Setting up NIS domain

- NIS must be initialized on all masters and slaves
- On servers (in `/var/yp`)
 - Set NIS domain name using **domainname**
 - Run **`ypinit -m/-s master`**
 - Run **`ypserv`**
- On slaves, also want **`crontab`** entries to pull fresh copies
- On clients
 - Set NIS domain (in `/etc/sysconfig/network` for RHEL/CentOS)
 - Still need `/etc/passwd` and `/etc/group` for root without NIS

NIS, NIS+ and LDAP

- NIS: Still somewhat common, but out of date
- NIS+
 - Extended, “fixed” re-write of NIS with better security
 - Buggy (on Linux), and development has stopped
- LDAP: Lightweight Directory Access Protocol
 - Really, just a database schema
 - Basis for **Microsoft Active Directory**
 - Can contain admin config data, but more typically contact information (phone, email, address, etc.)
 - Most email clients can use LDAP (e.g., the pine mailer, Apple Mail)
 - RHEL/CentOS comes with API, clients and servers from OpenLDAP.org

